Garland Electric Convection Oven



Model: MCOE5LDSMD



Model MCOE5LDSMD

Product Features:

- Solid state digital control with 150° to 500°F temperature range. Factory pre-programmed buttons to McDonald's specs with the availability to change or add menu items as needed. Single bake times for various product batch sizes. Card reader functionality for simplified menu upgrades. Controls designed to operate with various languages using a 32 character display. 88 program spaces available with a pre-set library of product names. Fast Cool feature provided to extend motor life.
- Compliance tested to UL710B, the Standard for Recirculating Systems and NFPA96, the Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations to allow for non-exhaust hood applications.

Garland Master Half-Size electric convection oven. McD's spec electronic programmable control. Variable speed motor (Hi, Lo & Pulse). Porcelain enameled oven interior with stainless steel baffle, chrome plated racks and rack guides. Stainless steel front, top and sides. New cool touch exterior design with oven top for use as a work surface. Units are without casters unless ordered otherwise.

NOTE: Ovens suppled with a stacking kit must be installed with an approved restraining device.

The specifications on this sheet are for the exclusive use of licensees of the McDonald's Corporation.

Manufactured Exclusively for McDonald's by: Garland Commercial Ranges Ltd. 1177 Kamato Road, Mississauga, ON L4W 1X4 Phone: (905) 624-0260 • Fax: (905) 624-1851 • Toll Free: (800) 427-6668

- Oven cavity porcelainized for cleanability and measures 15-1/2" (394mm) W x 20" (508mm) H x 21-1/8" (537mm) D.
- Oven supplied with (3) removable racks and (2) 5-position rack guides.
- Baffle is easily removed for cleaning.
- 1/3 hp, 2-speed motor with thermal hi-limit and centrifugal switch protection.
- 7.5kW elements and enhanced insulation package provide quick recovery and even bake results.
- Single oven door with top-to-bottom handle and roller latches providing smooth operation.
- 8' SOOW Cord with HUBBELL pin and sleeve L430P9 plug.
- Two year limited parts and labor warranty (USA and Canada only).
- Five year limited door hinge warranty (USA and Canada only).

Optional Features:

- o NSF approved 4" casters supplied allowing the oven to be moved for cleaning.
- o Extra Oven racks.
- o Single or three phase, 208 or 240 volt.
- o Single or three phase, 230 volt.
- o Other stacking kit (P/N 4529069)
- o Other cord configurations available upon request.
- o 8' SOOW Cord with NEMA L15-30P plug and L15-30R receptacle.








Electric Convection Oven



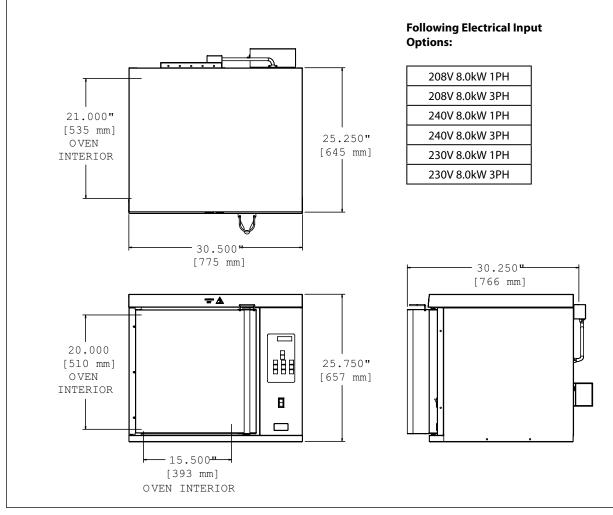

Element Package	Total kW	Nominal Amperes Per Line											
		208V/1Ph	240V/1Ph	208V/3Ph			240V/3Ph			240V/1Ph	230V /3Ph N 400V		
				Х	Y	Z	Х	Y	Z	2400/1111	Х	Y	Z
Standard	8.0	38.5	33.3	20.8	23.0	23.0	18.0	20.0	20.0	34.8	13.1	10.9	10.9

Electrical specifications include motor requirements. Double-deck models require 2 separate power supplies.

Combust	ible Wall	Er	Shipping Weight		
Sides	Rear	Crated	Uncrated	Weight	
1″ (25mm)	1″ (25mm)	36" (914mm)	31″ (787mm)	350lbs. (159Kg)	

The specifications on this sheet are for the exclusive use of licensees of the McDonald's Corporation.

Manufactured Exclusively for McDonald's by: Garland Commercial Ranges Ltd. 1177 Kamato Road, Mississauga, ON L4W 1X4 Phone: (905) 624-0260 • Fax: (905) 624-1851 • Toll Free: (800) 427-6668



Form# MCOE5LDSMD (09/22/15)